

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 June 2003 (05.06.2003)

PCT

(10) International Publication Number
WO 03/047177 A1

(51) International Patent Classification⁷: **H04L 12/28**,
12/56

(21) International Application Number: PCT/US02/38028

(22) International Filing Date:
26 November 2002 (26.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/995,449 27 November 2001 (27.11.2001) US

(71) Applicant: **INTEL CORPORATION** [US/US]; 2200
Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventor: **RUSCH, Leslie**; 160 Saunders, Quebec, QC
G1R 2E3 (CA).

(74) Agents: **STEFFEY, Charles, E.**; Schwegman, Lunberg,
Woessner & Kluth, P.A., P.O. Box 2938, Minneapolis, MN
55402 et al. (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND METHOD FOR INTELLIGENT WIRELESS COMMUNICATION SELECTION

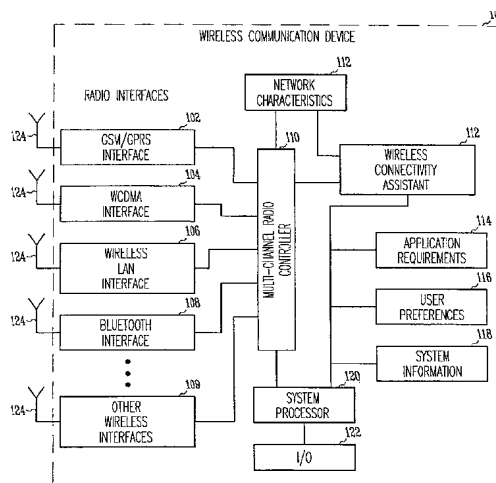

(57) **Abstract:** A wireless communication device (100) includes one or more radio interfaces (102-109) to communicate using various wireless protocols with different communication networks. The wireless device may, for example, be a notebook or laptop computer, a personal digital assistant (PDA), a mobile data terminal, wireless telephone, video camera or another multimedia device. A multi-channel radio controller (110) within the wireless device characterizes available communication networks to determine network characteristics including current network information. Available communication networks and services may be characterized by monitoring traffic, using location information, interrogating or from current connectivity. A wireless connectivity assistant (112) may select a communication network and service based on the network characteristics and at least one of user preferences, application requirements and system information.



WO 03/047177 A1

DEVICE AND METHOD FOR INTELLIGENT WIRELESS COMMUNICATION SELECTION

Field of the Invention

5

The present invention pertains to wireless communications, and in particular to wireless communication devices and methods for communicating.

Background of the Invention

10

Wireless communications are enabling changes of great scope and depth in our society. Remotely accessible computers and data systems are becoming more common allowing an almost unlimited amount of information to be available anywhere, anytime. Wireless data capabilities are also improving the productivity and accessibility of professionals in the field. Laptop and notebook computers equipped with radio frequency modems have enabled the formation of remotely located "virtual offices". The explosion of wireless communication has been fueled by advances in semiconductor technology and software. These advances have allowed audio and data signals to be transmitted over digital networks.

20

One problem with current wireless communications is that a user is typically dependent on a single radio interface which communicates over a wireless link that is easily lost when traveling out of range or in a null coverage area, or lost due to congestion. Although other communication networks may be available, the radio interface is not able to make use of these other networks. For example, a device communicating with a network utilizing a code division multiple access (CDMA) link may not be able to transition to another network such as a wireless local area network (WLAN) when the CDMA link becomes unavailable. Although some wireless devices may implement more than one transceiver for communicating with different communication networks, these devices do not readily transition between the transceivers, nor do they exhibit flexibility in assessing the worth of the network. Another problem with current wireless communications is that the network connection is not optimized for the application being used. For example, the same network connection for voice communications may not be suitable for video or data transfer.

30

Thus, it would be advantageous for wireless devices, including portable and laptop computers, to communicate more effectively and efficiently over the airwaves. It would also be advantageous for wireless devices to transition between communication networks when a network becomes unavailable. It would also be advantageous for wireless devices to select between available connections. It would also be advantageous for wireless devices to optimize communications for the application.

Brief Description of the Drawings

The invention is pointed out with particularity in the appended claims. However, a more complete understanding of the present invention may be derived by referring to the detailed description when considered in connection with the figures, wherein like reference numbers refer to similar items throughout the figures and:

FIG. 1 is a simplified functional block diagram of a portion of a wireless communication device in accordance with an embodiment of the present invention; and

FIG. 2 is a flow chart of an intelligent network selection and communication procedure in accordance with an embodiment of the present invention.

Detailed Description

The description set out herein illustrates the various embodiments of the invention and such description is not intended to be construed as limiting in any manner. The present invention relates to wireless communications and provides, among other things a wireless communication device and method for intelligent selection among available communication networks. In accordance with one embodiment, a wireless communication device includes one or more radio interfaces to communicate using various wireless protocols with different communication networks. The wireless device may, for example, be a notebook or laptop computer, a personal digital assistant (PDA), a mobile data terminal, a wireless telephone, digital camera, video camera or other multimedia device, and may include functional combinations thereof. A multi-channel radio controller within the wireless device characterizes available communication networks to determine network characteristics including current network information. Available communication networks may be characterized by monitoring traffic, using location information, interrogating networks and/or services, or from current connectivity. A wireless connectivity assistant

selects a communication network based on the network characteristics, user preferences, application requirements and system information.

FIG. 1 is a simplified functional block diagram of a portion of a wireless communication device in accordance with an embodiment of the present invention.

5 Wireless communication device 100 characterizes available networks to determine current network information, and may select one of the available networks based on the current network information and at least one of user preferences, application requirements and system information. Wireless communication device may be any communication device including, for example, a notebook or laptop computer, a personal digital assistant (PDA),
10 a mobile data terminal, wireless telephone, digital camera, video camera or other multimedia device, and may include functional combinations thereof. For simplicity, all functional elements of device 100 may not be illustrated in FIG. 1.

Wireless communication device 100 may include one or more of several radio interfaces to allow communication over wireless links with various communication
15 networks. The radio interfaces may include a packet radio interface, such as GSM/GPRS interface 102 for communicating with packet radio communication systems such as Global System for Mobile Communications (GSM) or General Packet Radio Service (GPRS) systems. The radio interfaces may also include a digital mobile radio interface such as Wideband Code Division Multiple Access (WCDMA) radio interface 104. The radio
20 interfaces may also include wireless local area network (LAN) interface 106 for communicating in accordance with wireless LAN standards such as IEEE 802.11(a) and 802.11(b). The radio interfaces may also include a short-range wireless interface such as Bluetooth interface 108 for communicating with PC's, mobile phones and other portable devices in accordance with a short range digital communication protocol such as
25 Bluetooth. Bluetooth wireless technology is a de facto standard, as well as a specification for small-form factor, low-cost, short range radio links between mobile PCs, mobile phones and other portable devices. The radio interfaces may also include an ultra-wideband (UWB) interfaces where no carrier is used. Wireless device 100 may also include other radio interfaces 109, which may, for example, be an ultra-wideband (UWB)
30 interface which use no carrier, an analogue RF interface or an optical interface. Although device 100 is illustrated with several interfaces 102 – 109, nothing requires that device 100 include all interfaces.

In one embodiment of the present invention, one or more of the radio interfaces may include software radio interfaces or modules. In this embodiment, a software radio

interface may be a software radio configurable with software to allow the radio interface to be used/reused for different radio links. For example, rather than a radio interface having separate hardware for different communications (e.g., WCDMA and 802.11) packaged in one interface, a software radio interface may have components configured or
5 configurable to adopt the characteristics of the different communication requirements.

The radio interfaces provide the RF or optical front-end functionality for communicating over a wireless link with a selected communication network. The radio interfaces receive digital signals from multi-protocol radio controller 110, and may modulate the signals on a suitable carrier frequency. The radio interfaces also may
10 demodulate signals received from antennas 124 and send a digital signal to radio controller 110. In the case of UWB communications, modulation and demodulation to and from a carrier frequency may not be performed. Radio controller 110 configures the information in accordance with an appropriate protocol for the communication link.

The radio interfaces are illustrated as functionally separate units for ease in
15 understanding the present invention, however any one or more may be combined as a single unit. Furthermore, although radio controller 110 is illustrated as a separate functional element from the radio interfaces, some of the functionality of radio controller 110 may be performed by the radio interfaces. For example, some processing specific to a particular protocol may be performed by a radio interface. In accordance with one
20 embodiment, radio interfaces may be added or removed from device 100, and device 100 may include slots adapted to receive additional radio interfaces. In accordance with another embodiment, one or more radio interfaces may be fabricated along with controller 110 as a separate module, circuit board or add-on card for use in device 100.

Multi-protocol radio controller 110 may be comprised of one or more processors
25 configured with firmware and software to interface with wireless connectivity assistant 112 and system processor 120. Based on instructions and control signals from wireless connectivity assistant 112, radio controller 110 utilizes radio interfaces to characterize available networks and determine current network and service information. Current network and service information for an available network may include the services
30 available (e.g., packet radio, digital voice, data), protocol requirements (e.g., IEEE 802.11(a)/(b), TCP/IP, IPSec), quality of service (e.g., average bit-rate, packet latency and bit-error-rate), bit-rates available for a particular protocol, network congestion, cost of a particular service, power consumption, location information (e.g., distance to receiver) and available security (e.g., virtual private network (VPN) capability, encryption type,

encryption level). Bit-rate, as used herein may include a nominal bit-rate (i.e., the available bit-rate), an instantaneous bit-rate (i.e., the number of bits transmitted in the time of a packet), an average bit-rate (i.e., judging the number of packets to be transmitted or retransmitted over a period of time), or effective bit-rate (a bit-rate that factors in other
5 factors such as dropped packets).

Controller 110 may also query a service when multiple services are hosted by a network. For example, the same network may provide voice service, internet access, data service without internet access, a premium data service with better quality of service, subscription access, a public access service with a fee per use, a licensed access service for
10 client corporations, etc. Controller 110 may query both the network and the service to determine the network and service characteristics. Some services may have characteristics such as quality of service guarantees such that for some links, the quality of service may be function of factors such as network congestion, link quality, etc. Guarantees for quality of service may be associated with higher costs and an allocation of greater network assets,
15 such as additional bandwidth.

In characterizing the available communication networks and/or services, radio controller 110 may utilize one or more of the radio interfaces to monitor communications (e.g., traffic and signals) from one of the available communication networks. In this embodiment, the monitored communications may be used to identify available
20 communication networks and/or services as well as used to determine how busy a particular network and/or service is and to help identify available channels or available bandwidth for the particular network and/or service.

Radio controller 110 may also interrogate an available communication network and/or service to determine current network information and network characteristics. For
25 example, radio controller 110 may cause one or more of the radio interfaces to send an interrogation signal requesting network characteristics and current network information. Interrogation may include requests for information as well as requests for service. In a request for service, a connection may be established to ascertain information and/or have a back-up link in case an active link is dropped inadvertently. In one embodiment, the
30 power required to maintain a back-up link may be considered.

In one embodiment, radio controller 110 may use geographic location information to determine the characteristics of available communication networks. For example, device 100 may have the characteristics of various communication networks available for various geographic locations stored in a memory. The geographic location of

communication device 100 may be calculated and the characteristics of the available communication may be determined. A global positioning system (GPS) receiver (not shown) may be used to determine the geographic location of device 100, or alternatively, signals from transmitters of one or more of the communication networks may be used to
5 determine location (e.g., by triangulation). Additionally, location information may be used to determine proximity to network transmitters/receivers to determine some of characteristics that may affect communications. For example, a greater distance to a network's transmitter/receiver may require more transmission power by device 100, and/or may result in a lower signal-to-noise ratio or higher bit-error-rate.

10 In some situations, communication links may exist within the same frequency band (e.g., Bluetooth, 802.11b and Home-RF). In these situation, controller 110 may determine how much a link is degraded due to the presence of a competing system in the same frequency band providing more complete information on the available communication options. For example, although the controller may identify an 802.11b system, it may be
15 unusable due to a close proximity of a Bluetooth system. Alternatively, the 802.11b system may be utilized, for example, when the Bluetooth system is not being used or is in a "sleep" mode.

The network characteristics and current network information is accumulated by controller 110 for use by wireless connectivity assistant 112. Radio controller 110 may
20 store current network information and characteristics for the available networks and/or services in storage element 111. Wireless connectivity assistant 112 may be a software agent running on device 100 (e.g., on system processor 120) to interface between applications and the radio interfaces. Wireless connectivity assistant 112 may select one of the available networks for communicating based on the current network information and
25 characteristics of the available networks and/or services stored in element 111, application requirements stored in element 114, user preferences stored in element 116, and system information stored in element 118. Elements 111, 114, 116 and 118 are illustrated as separate elements to facilitate the understanding of the invention, however one or more physical storage locations accessible by wireless connectivity assistant 112 may be
30 utilized.

Application requirements stored in element 114 are the requirements a particular software application may require for communicating with a network, and may include requirements for communicating over a wireless link. Application requirements may include, for example, bit-rate requirements, quality of service requirements, connectivity

continuity requirements and privacy/security requirements. Application requirements may also include, latency and bit-rate information for a particular applications. For example, voice communication may require lower latency and a lower bit-rate than video conferencing which may require a higher bit-rate and a higher latency. Video playback, on the other hand, may be more tolerant on latency. Applications may include software for email communications, video conferencing, data transfer, internet access, audio transfer, teleconferencing and voice conversations.

System information stored in element 118 includes information about the elements of device 100 that are relevant to network communications. In general, system information may include system requirements as well as system constraints as well as other system related information. For example, system information may include battery/power characteristics, video display characteristics, processing abilities and processing speed, privacy requirements, camera resolution, and audio characteristics (e.g., speaker and/or headphone quality). Among other things, system information may be used by connectivity assistant 112 to help select an available communication network, service and protocol for communicating. For example, video quality in excess of what the video display is capable of displaying (or may be configured to display) need not be obtained, and therefore a higher bit-error rate or lower signal-to-noise ratio may be acceptable. System information may also, for example, include a window size for which a video may run allowing connectivity assistant to select lower bit-rates when the window size is small.

User preferences stored in element 116 may include a user's preferred communication carrier, quality preferences, power constraints, and privacy preferences. The user's quality preferences may include different quality of service tolerances and/or preferences for different types of communications and may vary depending on the particular application. For example, the user may prefer a more stable lower-quality video over a less stable higher-quality video; the user may prefer that lower power communications be selected if he/she relies heavily on battery power; or the user may prefer lower cost communications or a particular carrier or service provider for certain types of communications. User preferences may, for example, indicate that when the battery is low, the user desires communication links requiring lower power or that links with increased bit-error-rates are acceptable. In one embodiment, user preferences may be stored in a memory element such as a smart card or token which may be inserted into device 100. User preferences may be input by user through I/O 122. Wireless connectivity assistant 112 pulls together the user preferences, application requirements, and system

information to make an intelligent selection among the available communication networks. Desirably, wireless connectivity assistant 112 operates without user intervention providing the user with a more gratifying wireless communication experience.

5 In accordance with one embodiment, controller 110 interprets commands from applications and may switch between wireless links of various networks in response to changing conditions (e.g., link degradation, increased network congestion) or changing application requirements (e.g., a new or current application requires additional bandwidth). Controller 110 also may maintain one or more wireless links with a network and permits the simultaneous communication with several networks with concurrently
10 running applications. Accordingly wireless device 100 need not be dependent on one wireless link with any one network.

In one embodiment where the wireless device is a multimedia device, such as a video camera, for example, with limited storage capability, the video data may be sent to a remote location having additional storage capacity, such as the user's home. In this
15 embodiment, the multimedia device may include the wireless capabilities described herein or may be coupled with a wireless communication device.

FIG. 2 is a flow chart of an intelligent network selection and communication procedure in accordance with an embodiment of the present invention. Procedure 200 may be performed by device 100 (FIG. 1) or may be performed by another wireless
20 communication device suitably configured. Although the individual operations of procedure 200 are illustrated and described as separate operations, it should be noted that one or more of the individual operations may be performed concurrently. Further, nothing necessarily requires that the operations be performed in the order illustrated. Procedure 200 characterizes available networks and/or services to determine current network
25 information and selects one of the available networks based on the current network and service information, and at least one of user preferences, application requirements and system information.

Operation 202 characterizes the available networks and/or services to determine network characteristics and current network and service information. Operation 202 may
30 utilize traffic analysis information 204, location information 206, interrogation information 208 and current connection information 210. Operation 202 may be performed, for example, by multi-channel radio controller 110 (FIG. 1) described previously.

Operation 212 may select an available network based on the network characteristics and current network and service information obtained in operation 202, and at least one of user preferences 214, application requirements 216 and system information 218. Operation 212 may be performed by wireless connectivity assistant 112 (FIG. 1).

5 User preferences 214 may correspond with user preferences stored in element 116 (FIG. 1), application requirements 216 may correspond with application requirements stored in element 114 (FIG. 1) and system information 218 may correspond with system information stored in element 118 (FIG. 1).

10 Operation 220 initiates a communication session with the selected available communication network and services, and operation 222 communicates in accordance with the application. Operation 224 monitors current communication conditions and may select another communication link or another communication network and/or services as appropriate based on, for example, user preferences, application requirements and system information.

15 Thus, an improved wireless device that communicates more effectively and efficiently over the airwaves has been described. The wireless device may be a laptop or portable computer. A multi-channel radio controller within the wireless device characterizes available communication networks and/or services to determine network characteristics including current network and service information. Available
20 communication networks may be characterized by monitoring traffic, using location information, interrogation or from current connectivity. A wireless connectivity assistant selects a communication network based on the network characteristics and at least one of user preferences, application requirements and system information. In one embodiment, the wireless device transitions between communication networks when a network or
25 service becomes unavailable. In another embodiment, the wireless devices optimizes the wireless communications for the particular application.

30 The foregoing description of the specific embodiments reveals the general nature of the invention sufficiently that others can, by applying current knowledge, readily modify and/or adapt it for various applications without departing from the generic concept, and therefore such adaptations and modifications are intended to be comprehended within the meaning and range of equivalents of the disclosed embodiments.

It is to be understood that the phraseology or terminology employed herein is for the purpose of description and not of limitation. Accordingly, the invention is intended to

embrace all such alternatives, modifications, equivalents and variations as fall within the spirit and broad scope of the appended claims.

CLAIMS

What is claimed is:

- 5 1. A method for selecting a network for wireless communicating comprising:
characterizing available networks to determine current network information; and
selecting one of the available networks based on the current network information
and at least one of user preferences, application requirements and system information.
2. The method of claim 1 further comprising initiating a communication session
with the selected wireless communication network
- 10 3. The method of claim 1 wherein characterizing comprises interrogating at least
one of the available networks to determine the current network information.
4. The method of claim 1 wherein characterizing comprises monitoring traffic on
at least one of the available networks to determine the current network information.
5. The method of claim 1 wherein characterizing comprises determining a
15 geographic location and determining the current network information from the geographic
location.
6. The method of claim 5 wherein determining the geographic location includes a
triangulation of signals from at least one of the available networks.
7. The method of claim 1 wherein characterizing comprises maintaining a
20 communication link with at least one of the communication networks to determine the
current network information.
8. The method of claim 1 wherein the current network information includes at least
one of bit-error-rate, bit-rate, packet size, network congestion, delay, security and cost for
at least one available network.
- 25 9. The method of claim 1 further comprising:

- communicating with the selected network over a wireless link;
monitoring a quality of the wireless link during communicating;
selecting another wireless link with another network when the quality decreases;
and
5 switching to communicating with the another network.

10. A computer readable medium having program instructions stored thereon for performing a method of selecting a communication network when executed within a digital processing device, the method comprising:
characterizing available networks to determine current network information; and
10 selecting one of the available networks based on the current network information and at least one of user preferences, application requirements and system information.

11. The computer readable medium of claim 10 wherein the current network information includes at least one of bit-error-rate, bit-rate, packet size, network congestion, delay, security and cost for at least one available network.

- 15 12. The computer readable medium of claim 11 wherein characterizing comprises interrogating at least one of the available networks to determine the current network information.

13. The computer readable medium of claim 12 wherein characterizing further comprises monitoring traffic on at least one of the available networks to determine the
20 current network information.

14. The computer readable medium of claim 13 wherein characterizing further comprises determining a geographic location and determining the current network information from the geographic location.

15. The computer readable medium of claim 14 wherein characterizing comprises
25 maintaining a communication link with at least one of the communication networks to determine the current network information.

16. A wireless communication device comprising:

- radio interfaces to communicate with networks;
a multi-protocol radio controller to characterize available networks to determine current network information; and
a wireless connectivity assistant to select one of the available networks based on
5 the current network information and at least one of user preferences, application requirements and system information.

17. The communication device of claim 16 wherein the radio interfaces comprise at least one of a packet radio system interface, a cellular radio interface, a wireless local area network interface, and a short-range digital wireless interface.

- 10 18. The communication device of claim 16 wherein the controller causes radio interfaces to interrogate available networks to determine current network information.

19. The communication device of claim 16 wherein the controller uses the radio interfaces to monitor traffic on available networks to determine current network information.

- 15 20. The communication device of claim 16 wherein the controller uses the radio interfaces to determine a geographic location, and determines the current network information based on the location.

21. The communication device of claim 16 wherein the controller causes at least one of the radio interfaces to maintain a communication link with an available network to
20 determine current network information.

22. The communication device of claim 16 wherein the current network information includes at least one of a bit-error-rate, packet size, network congestion, security, and cost for an available network.

23. The communication device of claim 22 wherein the user preferences include at
25 least one of a preferred network carrier, a tolerance to quality of service, a security level and power constraint, and wherein the application requirements include at least one of a

bit-rate requirement, a quality of service requirement, a connection continuity requirement, and a security requirement.

24. The communication device of claim 23 wherein the system information includes at least one of a power constraint, security requirement, processor speed, display resolution, processing capability, camera resolution, and audio capabilities.

25. The communication device of claim 16 wherein the communication device is a portable computer.

26. An agent to select a network for wireless communications comprising:
a characterizing portion to characterize available networks to determine current
network information; and
a selecting portion to select one of the available networks based on the current
network information and at least one of user preferences, application requirements and
system information,
wherein the current network information includes at least one of bit-error-rate, bit-
rate, packet size, network congestion, delay, security and cost for at least one available
network.

27. The agent of claim 26 wherein the characterizing portion monitors traffic on at least one of the available networks to determine the current network information.

28. The agent of claim 26 wherein the characterizing portion includes at least one
of:
an interrogating portion to interrogate at least one of the available networks to
determine the current network information;
a determining portion to determine a geographic location and determining the
current network information from the geographic location; and
a maintaining portion to maintain a communication link with at least one of the
communication networks to determine the current network information.

1/2

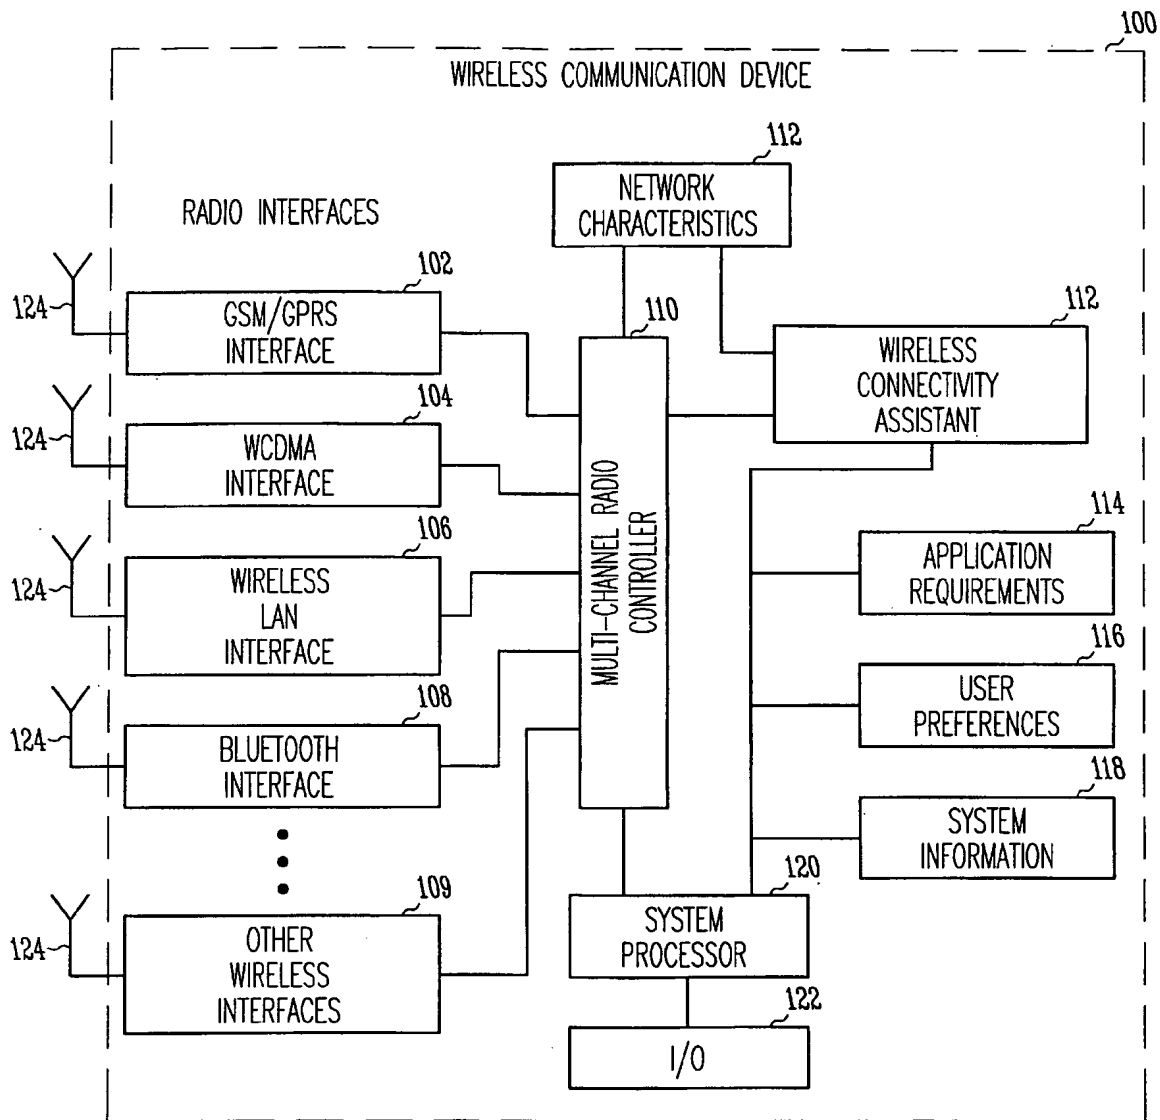
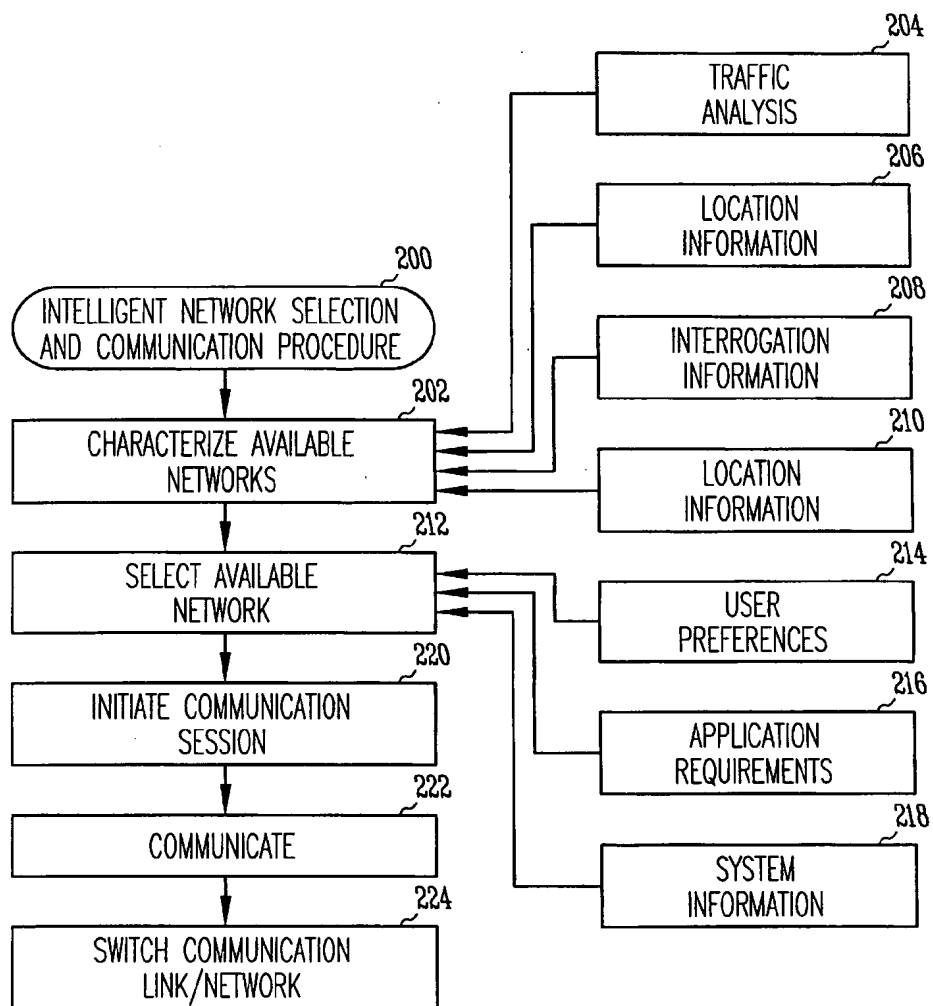


Fig. 1

2/2

*Fig. 2*

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/38028

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/28 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 28947 A (NOKIA MOBILE PHONES LTD ;VAZVAN BEHRUZ (FI); JORMALAINEN JANNE (US) 19 September 1996 (1996-09-19) page 2, line 25 -page 4, line 22 page 6, line 15 -page 8, line 19 page 8, line 33 -page 13, line 31 page 15, line 20 -page 16, line 10 claim 18 figures 1-4	1-4, 7-13, 15-19, 21-28
Y	---	5,6,14, 20
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

27 March 2003

Date of mailing of the international search report

02/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vaskimo, K

INTERNATIONAL SEARCH REPORT

Internatic pplication No

PCT/US 02/38028

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 22662 A (TANTIVY COMM INC) 29 March 2001 (2001-03-29)	1-4, 8, 10-13, 16-19, 22, 23, 25-28
A	page 3, line 16 -page 5, line 19 page 13, line 1 -page 15, line 21	5-7, 9, 14, 15, 20, 21, 24
X	WO 01 035578 A (MOBILIAN CORPORATION) 17 May 2001 (2001-05-17)	1-4, 8, 10-13, 16, 18, 19, 22-28
A	page 2, line 12 -page 3, line 5 page 4, line 23 -page 5, line 11 page 6, line 25 -page 7, line 17 page 11, line 17 -page 12, line 5 figures 1, 6	5-7, 9, 14, 15, 20, 21
X	EP 1 119 137 A (LUCENT TECHNOLOGIES INC) 25 July 2001 (2001-07-25)	1, 4, 10, 13, 16, 19, 26
A	page 3, paragraphs 11-19 page 4, paragraphs 30-32 page 5, paragraphs 41-46	2, 3, 5-9, 11, 12, 14, 15, 17, 18, 20-25
Y	US 6 259 917 B1 (ELZEIN HADI) 10 July 2001 (2001-07-10)	5, 6, 14, 20
A	column 2, line 37 -column 3, line 7	1-4, 7-13, 15-19, 21-28
A	US 5 412 375 A (WOOD DANIEL E) 2 May 1995 (1995-05-02) the whole document	1-28
A	WO 99 29126 A (JOERESSEN OLAF J ;NOKIA MOBILE PHONES LTD (FI)) 10 June 1999 (1999-06-10) the whole document	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/38028

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9628947	A	19-09-1996	FI 951181 A AU 4881196 A EP 0815701 A1 WO 9628947 A1 JP 11501783 T US 6400946 B1	14-09-1996 02-10-1996 07-01-1998 19-09-1996 09-02-1999 04-06-2002
WO 0122662	A	29-03-2001	US 6526034 B1 AU 7082000 A EP 1214815 A1 NO 20021385 A WO 0122662 A1	25-02-2003 24-04-2001 19-06-2002 16-05-2002 29-03-2001
WO 01035578	A	17-05-2001	AU 7622200 A AU 7734400 A AU 7734500 A AU 7736600 A EP 1216542 A1 EP 1222777 A1 EP 1216545 A1 EP 1232607 A1 WO 0124455 A1 WO 0124456 A1 WO 0124457 A1 WO 0135578 A1	30-04-2001 30-04-2001 30-04-2001 06-06-2001 26-06-2002 17-07-2002 26-06-2002 21-08-2002 05-04-2001 05-04-2001 05-04-2001 17-05-2001
EP 1119137	A	25-07-2001	EP 1119137 A1 JP 2001217853 A US 2001010689 A1	25-07-2001 10-08-2001 02-08-2001
US 6259917	B1	10-07-2001	AU 3114000 A WO 0035212 A1	26-06-2000 15-06-2000
US 5412375	A	02-05-1995	NONE	
WO 9929126	A	10-06-1999	AU 1500299 A EP 1038409 A1 GB 2347321 A , B WO 9929126 A1	16-06-1999 27-09-2000 30-08-2000 10-06-1999